

1805/050384

PA 1272809

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME;

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

January 18, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/542,404

FILING DATE: February 06, 2004

REC'D 04 FEB 2005


WIPO

PCT

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS

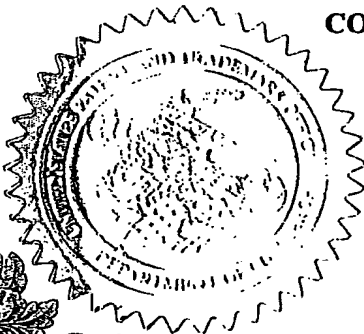

P. SWAIN  
Certifying Officer

## PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label N .

EK419165603US

17621 U.S. PTO

22264 U.S. PTO  
60/542404

020604

INVENTOR(S)					
Given Name (first and middle [(if any)])	Family Name or Surname	Residence (City and either State or Foreign Country)			
Sue	POSCHMANN	Andover, MA			
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (500 characters max)					
TELEMETRY SYSTEM WITH OUT OF RANGE NOTIFICATION FEATURES					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input type="checkbox"/> Customer Number		<input type="text"/>		<input type="text"/>	
OR		Type Customer Number here		Place Customer Number Bar Code Label here	
<input checked="" type="checkbox"/> Firm or Individual Name		Philips Intellectual Property & Standards			
Address		595 Miner Road			
Address					
City		Cleveland	State	Ohio	ZIP 44143
Country		US	Telephone	440-483-4281	Fax 440-483-4874
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification		Number of Pages	8	<input type="checkbox"/> CD(s), Number <input type="text"/>	
<input checked="" type="checkbox"/> Drawing(s)		Number of Sheets	3	<input type="checkbox"/> Other (specify) <input type="text"/>	
<input type="checkbox"/> Application Data Sheet.		See 37 CFR 1.76			
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT					
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.				FILING FEE AMOUNT (\$)	
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:		14-1270		\$160.00	
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.					
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/> No.					
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____					

Respectfully submitted,

SIGNATURE

*Tom Lundin*

Date 02/06/2004

TYPED or PRINTED NAME Thomas M. Lundin, Esq.

TELEPHONE 440-483-4281

REGISTRATION NO.  
(if appropriate)  
Docket Number:

48,979

PHUS040062USP

### USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

## TELEMETRY SYSTEM WITH OUT OF RANGE NOTIFICATION FEATURES

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention provides a system and method for alerting a patient when he or she moves out of the monitoring range of a medical telemetry system.

#### 5      2. Description of the Related Art

Medical telemetry systems that enable physiological data of remotely located patients to be monitored from a central location are well known in the art. Unless these ambulatory patients are continuously supervised, they may wander out of the system's coverage area leaving them unmonitored. Although alerts are generated at a central nursing station, currently there is no means of  
10      alerting individuals with the device that they have left the coverage area.

Therefore, there is a need in the art for alerting patients as they move out of a coverage area.

### SUMMARY OF THE INVENTION

15      The present invention overcomes the above-described problem, and provides additional advantages, by providing a method and apparatus for notifying the users of a telemetry device as they move out of a coverage area of a network. In particular, the user is notified after losing a connection with the network or after a specified period has expired in attempting to reestablish a connection with the network, by receiving an audio and/or visual signal from the telemetry device. Telemetry may be  
20      equipped with means for establishing a connection with a central monitoring station, means for processing patient data collected by a respective telemetry device, and means for transmitting an audio and/or visual signal as the user moves out of the coverage area of the network.

### BRIEF DESCRIPTION OF THE DRAWINGS

25      FIG. 1 is a simplified block diagram illustrating a networking environment whereto embodiments of the present invention are to be applied;

FIG. 2 illustrates another view depicting the system whereto embodiments of the present invention are to be applied; and,

FIG. 3 is a simplified block diagram illustrating the telemetry device in accordance with the present invention.

5

### DETAILED DESCRIPTION OF THE INVENTION

It is to be understood by persons of ordinary skill in the art that the following descriptions are provided for purposes of illustration and not for limitation. An artisan understands that there are many variations that lie within the spirit of the invention and the scope of the appended claims. Unnecessary detail of known functions and operations may be omitted from the current description so as not to obscure the present invention.

FIG. 1 illustrates a representative network whereto embodiments of the present invention are to be applied. As shown in FIG. 1, communication typically takes place between the telemetry device 10 and the access point (AP) 12, which is within the same radio coverage area. Each telemetry device 10 senses physiological data of a respective patient and transmits it to a central station via the access point 12. The physiologic data may include numeric data such as blood pressure, CO<sub>2</sub>, temperature readings, ECG signals, and other patient-related data.

Referring to FIG. 2, a central monitoring station 14 communicates via radio frequency with a plurality of battery-powered remote telemetry device 10 via an access point 12 for monitoring purposes. The central station 14 displays the patient data it receives and also transmits various control signals to each telemetry device 10. The central station 14 may include a personal computer (PC) and executes medical-monitoring software that is adapted to the needs of the network in which the system is installed. The transmission of data between the central station 14 and each telemetry device 10 may be achieved using a time-divisional multiple access (TDMA) scheme, Code Division Multiple Access (CDMA) scheme, frequency-divisional multiple access (FDMA), or other conventional modulation schemes known to artisans. Further, to provide a greater coverage area, multiple access points 12 and central stations 14 can be strategically provided through the desired coverage area, with the central stations 14 interconnected by a wired local area network (LAN).

Referring to FIG. 3, each telemetry device 10 may include a sensory circuit 20, a transceiver 22, a button 24, a memory 26, a controller 28, a battery 30, a timer 32, an audio module 34, and a display screen 36.

The sensory circuit 20 is coupled to the controller 28 to receive patient data, which may be stored in the memory 26, to process, and to communicate to the central station 14. The controller 28 communicates with the central station via the transceiver 22, which may be any of a variety of wireless transceivers known to those skilled in the art. The transceiver 22 is coupled to an antenna and is  
5 configured to communicate with the access point 12 using the appropriate communications protocol and to transmit data received from the controller 28 with the central station 14.

The controller 28 is also coupled to the button 24, which is operable by a patient to input information to the controller 28, as well as to control the controller 28. Each button may have a single or multiple functions depending on such factors as the operating condition of the controller 28.

10 The controller 28 is operably coupled to receive power from a battery 30 and coupled to a memory 26. The memory 26 may be any one or a combination of devices adapted to store electronic information such as RAM, ROM, PROM, EPROM, etc. The memory 26 may be configured to store one or more software-control programs executable by controller 28 to perform its various functions including receiving and analyzing vital data, presenting information to a user, etc. In addition, the  
15 software may include programs necessary for communicating with the central station 14.

The controller 28 is coupled to the timer 32 for counting purposes and coupled to the audio device 34 to transmit audio signals or messages to the user. The controller 28 is further configured to control display screen 36 to display an image representing the patient data. It will be appreciated that the image displayed on the display screen 36 will vary depending on the patient data collected by the  
20 telemetry device 10.

In operation, the telemetry device 10 establishes communications with the central station 14 by transmitting a request for communications to the central station 14 via the access point 12. It will be appreciated by those of skill in the art that a telemetry device 10 may broadcast a request for communications in any of a variety of ways. The request signal may include a variety of parameters  
25 adapted to notify the central station 14 about the telemetry device 10. For example, a communications request may include the type, identity, and other capabilities of the telemetry device 10. The access point 12, or other network devices and routers, pass the communications request to the central station 14. Upon receiving the communications request, the central station 14 sends an acknowledgement back to the telemetry device 10, thus establishing a connection for a monitoring session.

30 Meanwhile, the transceiver 22 is coupled to an antenna to convert received patient data detected by the sensory circuit 20 and transmit it to the central station 14 via the access point 12 under the control of the controller 28. As is known to those of skill in the art, communications between the

telemetry device 10 and the central station 14 may be lost for a variety of reasons. For example, the patient is moved out of the range of the access point 12. In such event, the telemetry device 10 continues to attempt to establish a connection with the access point 12 by transmitting a request for communications to the central station 14. If a predetermined time period has passed after disconnection  
5 with the central station 14, the controller 28 alerts the patient by sending an audio and/or visual signal to inform him/her of the dropped communication via audio device 34 and display screen 36. Here, the timer 32 may be used to time-out an attempt to connect, or, alternatively, a number of connection attempts when the attempt to connect fails, but each type of network that can be connected by the telemetry device will have a connection protocol that determines how and for how long or for how  
10 many attempts a connection is attempted prior to notifying the user. In a preferred embodiment, these connection parameters are stored in the memory 26 and can be updated by download or interactively from the user interface.

Having thus described a preferred embodiment of a system and method for alerting the user of a telemetry device when he or she is out of the coverage area, it should be apparent to those skilled in  
15 the art that certain advantages of the system have been achieved. The foregoing is to be constructed as only being an illustrative embodiment of this invention. Persons skilled in the art can easily conceive of alternative arrangements providing a function similar to this embodiment without any deviation from the fundamental principles or the scope of this invention.

20 In addition, many modifications may be made to adapt the teaching of the present invention to a particular situation without departing from its central scope. Therefore it is intended that the present invention not be limited to the particular embodiments disclosed as the best mode contemplated for carrying out the present invention, but that the present invention include all embodiments falling within the scope of the appended claims.

**What is claimed is:**

1. A telemetry apparatus for notifying a user of moving out of a coverage area, comprising:

means for establishing a connection with a network in communication with a central monitoring station; and

means for transmitting an audio signal as the user moves out of the coverage area of the network.

2. The telemetry apparatus of Claim 1, further comprising means for collecting patient data of the user.

3. The telemetry apparatus of Claim 2, further comprising means for processing the patient data for a subsequent transmission to the central monitoring station.

4. The telemetry apparatus of Claim 1, further comprising means for displaying a visual signal as the user moves out of the coverage area of the network.

5. The telemetry apparatus of Claim 4, wherein the visual signal is transmitted after a predetermined time period has expired.

6. The telemetry apparatus of Claim 4, wherein the visual signal is transmitted after a predetermined number of attempts to reconnect to the network has failed.

7. The telemetry apparatus of Claim 1, wherein the audio signal is transmitted after a predetermined time period has expired.

8. The telemetry apparatus of Claim 1, wherein the audio signal is transmitted after a predetermined number of attempts to reconnect to the network has failed.

9. A system for notifying a user of moving out of a coverage area, comprising:  
a central monitoring station being adapted for wireless access with a plurality of telemetry devices for processing patient data;  
wherein, said telemetry device includes:  
means for establishing a connection with the central monitoring station; and  
means for transmitting an audio or visual signal as the user moves out of the coverage area of the network.
10. The system of Claim 9, further comprising means for collecting the patient data of the user.
11. The system of Claim 9, wherein the audio or visual signal is transmitted after a predetermined time period has expired.
12. The system of Claim 9, wherein the audio or visual signal is transmitted after a predetermined number of attempts to reconnect to the network has failed.
13. A method for notifying a user of moving out of a coverage area, the method comprising the steps of:  
providing a central monitoring station in communication with a plurality of telemetry devices in a network;  
continuously collecting patient data from the respective telemetry devices to the central monitoring station;  
detecting when at least one of the telemetry devices moves out of the coverage area of the network; and,  
transmitting an audio or visual signal when the user moves out of the coverage area of the network.
14. The method of Claim 13, wherein the detecting step further comprises the step of detecting whether at least one of the telemetry devices loses the connection with the central monitoring station for more than a predetermined time period.



PHUS040062USP

15. The method of Claim 14, wherein the audio or visual signal is transmitted after a predetermined number of attempts to reconnect to the network has failed.

PHUS040062USP

### ABSTRACT

5      An apparatus and method for notifying users of a telemetry device as they move out of the coverage area are provided. As the user of the telemetry device has moved out of the coverage area, the device notifies the user after attempting to establish a connection with the network for a predetermined time period, by transmitting an audio signal and/or displaying a visual signal.

25366.1

1/3

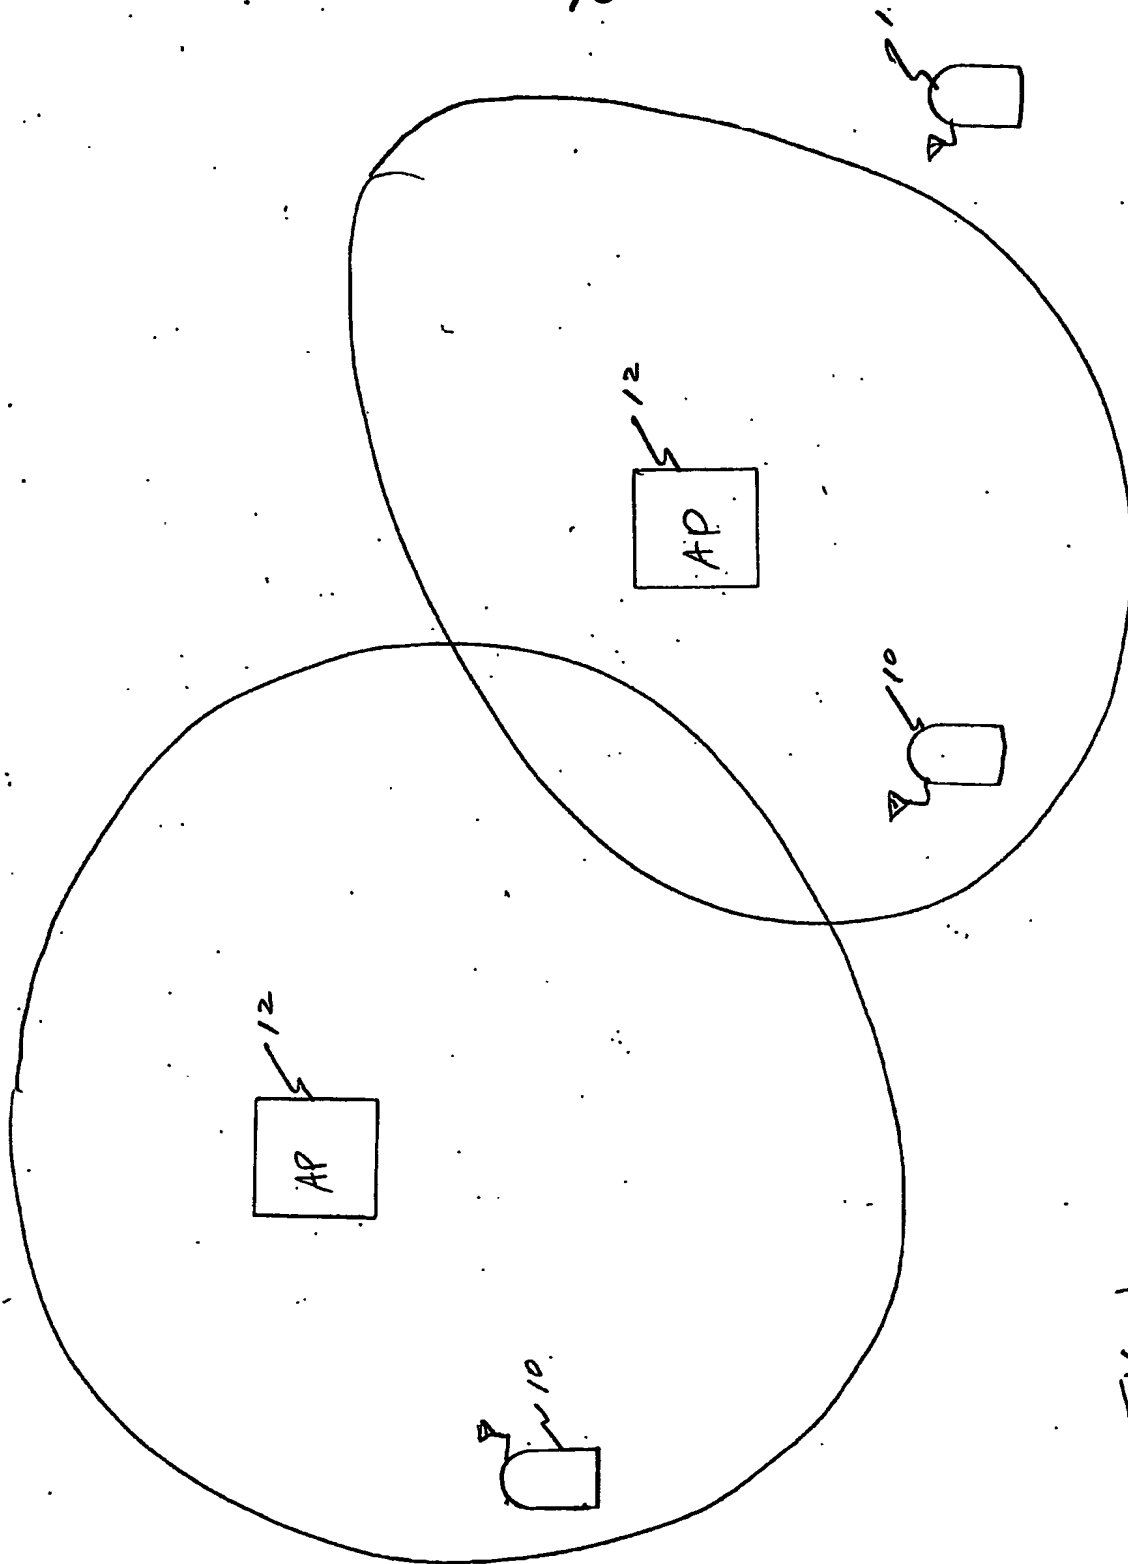


FIG. 1

2/3

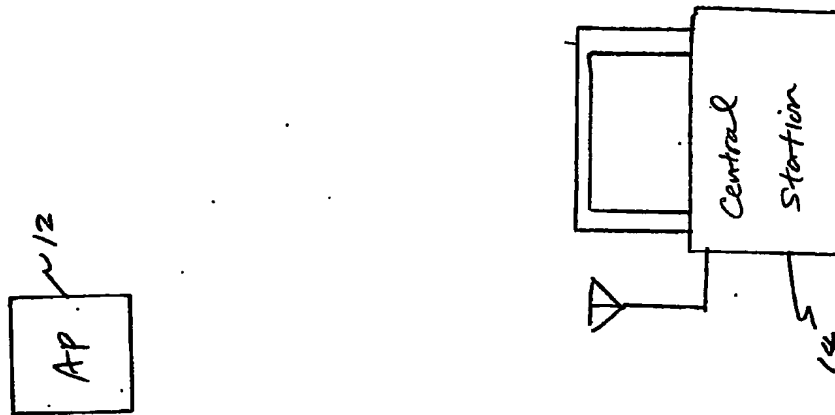


Fig. 2

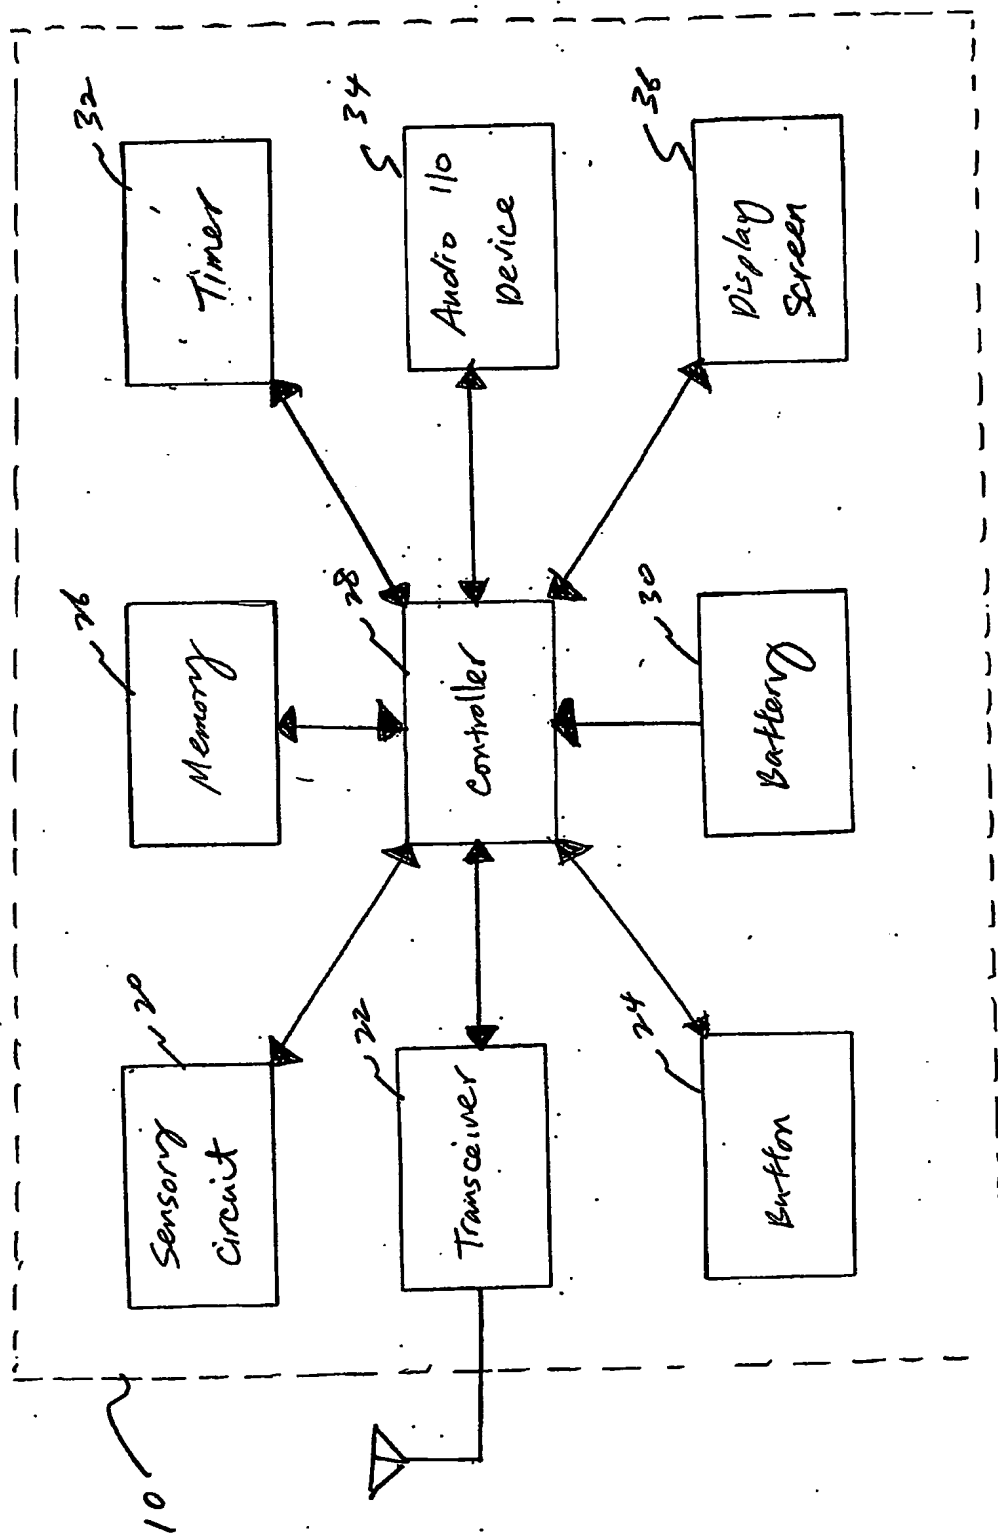


FIG. 3